


SM Transparency Catalog ▶ Polycor ▶ Granite Floor and Pavers




POLYCOR

Granite Floor and Pavers

Originating at the Polycor quarries and through production, granites are manufactured to tiles and pavers with a wide range of finishes. Granite is an inherently nonemitting source of VOCs and its durability allows it to perform impeccably in commercial & residential applications, interior or exterior.

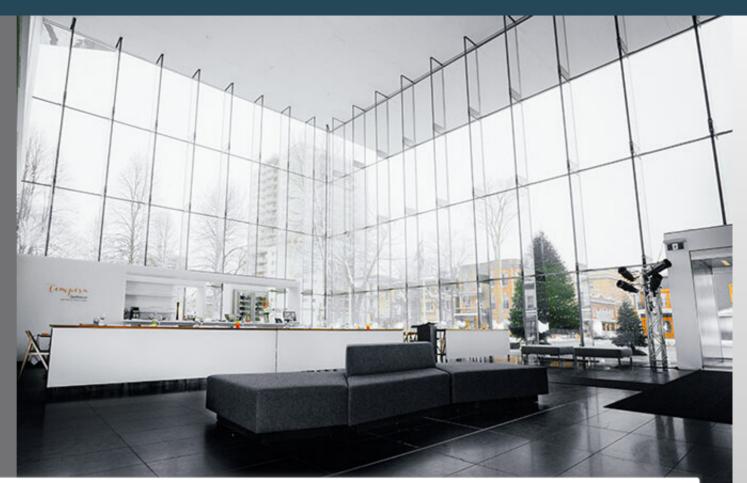

Performance dashboard

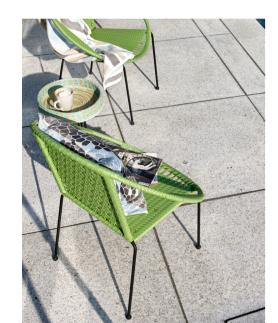

Features & functionality

Covers the wide selection of Polycor's heritage granites and any surface finishes available

Covers interior flooring solutions to exterior paving products, from tiles to XL pavers

Has an unmatched durability and minimal maintenance needs

Visit Polycor for more product information

Granites Commercial flooring Walkways and patios Floor tile

Environment & materials

Improved by:

Polycor's commitment to carbon neutrality translates

Reduction of product's GWP

Reduction of product's energy intensity

Polycor's ownship of the chain of custody from quarries to plants ensures:

No child labor and forced labor

Materials remain 100% natural, free from chemicals or dyes

Certifications & rating systems:

Environmental Product Declaration (EPD)

Natural Stone Sustainability Standard (ANSI 373)

Health Product Declaration (HPD)

MasterFormat® 09 30 33, 09 63 40, 32 14 40 **Granite Floor and Pavers Guide Specs** For spec help, contact us or call 418.692.4695

See LCA, interpretation & rating systems





SM Transparency Report (EPD)™

VERIFICATION

LCA

Transparency Report (EPD)

3rd-party verified

3rd-party reviewed



Validity: 2023/02/13 - 2028/02/13 Decl #: POL - 20230213 - 001

This environmental product declaration (EPD) was externally verified, according to ISO 21930:2017, SM Part A, and ISO 14025:2006, by Jack Geibig, President, Ecoform.

Ecoform, LLC 11903 Black Road, Knoxville, TN 37932

(865) 850-1883



SUMMARY

Reference PCR

Regions; system boundaries

North America; Cradle to grave

Functional unit / reference service life:

1 m² of floor covering; 75 years

LCIA methodology: TRACI 2.1

LCA software; LCI database SimaPro Developer 9.4

Ecolnvent 3.8, US-El 2.2

LCA conducted by: Sustainable Minds

Public LCA:

Polycor Inc.

76 rue Saint-Paul, Suite 100 Quebec City (Quebec), Canada G1K 3V9 418-692-4695



Contact us

Granite Floor and Pavers

LCA results & interpretation

SM Transparency Catalog ▶ Polycor ▶ Granite Floor and Pavers

Life cycle assessment

Scope and summary

Product description

○ Cradle to gate ○ Cradle to gate with options **②** Cradle to grave

Granite stone flooring can be applied as interior flooring, exterior flooring, landscaping, and terracing. It tends to be durable and easy to maintain, with

an elegant outlook. Granite makes up 100% of the total mass of the flooring and is used in commercial, residential, and public sector buildings. The results in this study are presented for flooring with a thickness of 0.5 inches. However, this study applies to both interior flooring and exterior

paving with a range of thicknesses and can be scaled using the scaling factors on Page 4. **Functional unit** The functional unit is **one square meter** of floor covering. The amount of

granite needed to meet the functional unit is 29.79 kg.

Manufacturing data The data for all granite stone products were collected from Polycor's granite

quarries and processing facilities covering a period of two years: January 2020 to December 2021. Data for granite quarry operations were collected

Other life cycle stages

MATERIAL

Granite

1.00E+00

5.00E-01

0.00E+00

LCA results

LIFE CYCLE STAGE

LIFE CYCLE STAGE

Impact category

Acidification

Eutrophication

Global warming

Ozone depletion

Non-carcinogenics

Respiratory effects

Se

PCRs

(Embodied Carbon)

Human health damage

Ecological damage

quarries and Canadian granite quarries. After granite is extracted from the quarry, it goes to a processing facility. Stone processor operations data were collected from eight Polycor granite processing sites across North America.

from 13 quarry sites across North America and grouped as American granite

• Canadian granite plants: five manufacturing facilities in Quebec. Data were collected from quarries and producers mainly operating in North America (mainly the US and Canada). As such, the geographical coverage

American granite plants: three manufacturing facilities respectively in

North Carolina, New Hampshire, and Maine.

- for this study is based on North American conditions.
- Default installation, packaging, and disposal scenarios Flooring is delivered at the job site ready for installation, where minor cuts may be necessary to accommodate design. Ancillary materials used in the

installation of the product include mortar, grout, and acrylate. These

materials are structural enhancement components used as bonding agents or fillers for joints. Wood and cardboard used as packaging to safely deliver the stone to the site is then transported to be either landfilled or recycled, following US EPA's end of life scenarios for containers and packaging. At the end of its useful life, the flooring is removed and transported to be landfilled.

Use of mortar during installation and periodic cleaning also generate

significant impacts to the overall life cycle impacts of granite flooring. Under normal operating conditions, granite flooring only requires monthly cleaning but does not require resealing. Due to the nature of natural stone, it is anticipated that the granite flooring products will last for the lifetime of the building. The reference service life (RSL) thus meets an ESL of 75 years, and flooring will need no replacements during its service life. End-of-life stages have lower contributions to the total life cycle impacts.

Material composition greater than 1% by weight

Total impacts by life cycle stages [mPts/per func unit]



of-life disposal

Waste processing and end-

A1-A3

PRODUCTION

TRANSPORT TO BUILDING SITES (QUARRY AND PROCESSOR OPERATIONS) Information modules: Included (X) A1 Quarry **A4** Transport to Excluded* (MND) operations building sites **A2** Transport to Stages B1, B3-B7, C1, and C3 though processors included, have no associated activities. **A3 Processor** *Module D is excluded. operations

3.15E+00 mPts Impacts of 1 square meter of floor covering Materials or processes contributing Energy >20% to total impacts in each life consumed during stone quarrying cycle stage and processing (electricity and fuels). TRACI v2.1 results per functional unit

Unit

kg SO₂ eq

kg CO₂ eq

kg CFC-11 eq

kg N eq

SM Single Score Learn about SM Single Score results

TRANSPORT TO BUILDING SITES (QUARRY AND PROCESSOR OPERATIONS) 0 3.26E-03 1.30E-01 1.66E-02 4.38E-04 2.40E+01

A1-A3

1.10E-06

1.05E-06

2.11E-06

1.26E-02

PRODUCTION

1.04E+00 2.07E-07

4.32E-10

3.91E-08

2.05E-04

4.38E-02 mPts

transportation

product to

building site.

used to transport

STONE

Truck

2.56E+00 1.23E-07

1.70E-08

1.97E-07

1.07E-03

Rating systems

Industry-wide (generic) EPD

✓ Product-specific Type III EPD

Industry-wide (generic) EPD

✓ Product-specific Type III EPD

✓ Product-specific EPD

performance.

1.18E-02

6.90E-04

3.03E-02 2.81E-07

3.57E-08

3.79E-07

1.31E-02

3.31E-02

2.53E-02

6.84E-01 1.36E-07

2.84E-10

2.57E-08

1.34E-04

2.14E-03

2.88E-04

1.30E-08 2.23E-11

8.83E-10

9.55E-05

½product

1 product

1 product

1.5 product

.5 point

1 point

.75 points

References

LCA Background Report

ISO 21930:2017 serves as the core PCR along with EN 15804 and SM Part A.

3rd-party reviewed

3rd-party verified

Validity: 2023/02/13 - 2028/02/13

Decl #: POL - 20230213 - 001

Transparency Report (EPD)

SM Part B: Product group definition for Interior and exterior stone flooring, April, 2022. Part B review conducted by the Sustainable Minds TAB, tab@sustainableminds.com

and is managed and maintained by the Sustainable Minds Technical

Polycor Natural Stone Flooring LCA Background Report (public version),

Polycor 2023. SimaPro Analyst 9.4, ecoinvent 3.4 database.

Download PDF SM Transparency Report, which includes the additional EPD content required by the SM Part B.

assertions unless the conditions defined in ISO 14025 Section 6.7.2. 'Requirements for building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under the PCR. Full conformance with the PCR for stone flooring allows EPD comparability only when all stages of a life cycle have been considered, when they comply with all referenced standards, use the same sub-category PCR, and use equivalent scenarios with respect to construction works. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI data sets may lead to different results upstream or downstream of the life cycle stages declared.

All life cycle stages For granite flooring, the cradle-to-gate stage (A1-A3) dominates the results for all impact categories except eutrophication and respiratory

What's causing the greatest impacts

stages.

effects. This study assessed a multitude of inventory and environmental indicators. In addition to the six major impact categories (global warming potential, ozone depletion, acidification, smog, eutrophication, and fossil fuel depletion), additional impact categories have also been included. These six impact categories are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined, and LCA should continue making advances in their development. However, the EPD users shall not use additional measures for comparative purposes. LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. Overall results are consistent with expectations for stone flooring's life cycles, with most of the impacts being generated during cradle-to-gate

The primary finding, across the environmental indicators, was that cradleto-gate stage (A1-A3) dominates the impacts due to the energy consumed at the quarries and processing plants. The processor operations (A3) stage is the highest contributor to most of the impact categories, followed by the

maintenance stage (B2) and quarry operations (A1). The cradle-to gate-

stage (A1-A3) contributes to ~60% of the total impacts in all impact categories except for eutrophication and respiratory effects. The transportation of stone from quarries to processing plants, transportation of flooring from processing plants to the installation sites, and use of mortar during installation also generate significant impacts in the overall life cycle impacts of granite flooring. **Quarry operations and transport to processors** Impacts generated at granite quarries (A1) are mainly due to the use of grid electricity and fuels in the quarries. Other material inputs generate little impact in comparison to the electricity and fuel consumed. The transportation of granite from quarries to processing plants also generates

Processor operations and transport to building sites Manufacturing operations at granite processing plants (A3) make up the

considerable impacts in numerous impact categories.

flooring manufactured in processor plants to the building sites also makes a significant impact on the overall life cycle impacts of granite flooring. Sensitivity analysis Based on the recommendation provided by Polycor, impacts for processor operations specific to a square meter of granite flooring was assumed to match the average stone processing for a square meter of granite. A

sensitivity analysis was performed to check the robustness of the results

Another parameter that affects the overall life cycle impacts is the

when the energy consumed during processing is varied by +/-20% from the

greatest impact share. Energy consumed at processors (both electricity

and fuels) is responsible for the majority of impacts, while other material

inputs have an insignificant contribution. The transportation of granite

estimate used in this study. The resulting variation in the total life cycle impacts is about 15%, implying that the system is not sensitive to this

assumed value.

AVG % WT.

4.10E-03

STONE

100%

thickness of granite flooring. The thickness of stone flooring studied varied up to 2 inches. Results have been presented for a typical interior thickness of 0.5 inches, but as the functional mass of varies with the thickness, the impacts also vary. A sensitivity analysis has thus been conducted for various thicknesses of granite flooring used for different flooring applications. For the thickness of 1.25 inches and larger, the variation in overall life cycle impacts is greater than 20%, implying that the system is sensitive to thickness value.

Natural stone is one of the lowest embodied carbon construction

materials. Although we are proud of this intrinsic quality, we want to

make sure that we'll never stop improving it. Our main driver is our ambitious 2025 carbon neutrality pledge. By increasing the use of renewable energy, reducing our dependency on fossil fuels, electrifying our car fleet and increasing the energy efficiency throughout our value chain, we aim to reduce our embodied carbon by 40% by the end of 2025! Beyond embodied carbon, Polycor only uses rainwater for stone extraction, recycles it, and also uses dry sawing technology in a growing number of quarry operations. In quarrying, production, installation and maintenance, natural stone lowers water use

See how we make it greener C3-C4 **B1-B7 DECONSTRUCTION WASTE** PROCESSING AND END-OF-LIFE DISPOSAL **AND WASTE**

TRANSPORT

Deconstruction

C2 Waste

transport

C3 Waste

disposal

Processing

C4 End of life

Polycor is the leader within the Natural Stone Sustainability Standard (ANSI 373) with 25% of our sites certified. This standard examines and

improving the baseline for the environmental and social performance

verifies numerous areas of natural stone production, effectively

of natural stone in alignment with green building practices.

B3 Repair

B5

B1 Use

B2 Maintenance

B4 Replacement

Refurbishment

B6 Operational energy use

B6 Operational water use

A5 Installation

throughout its life cycle.

1.20E-01 mPts 3.57E-01 mPts

Use of ancillary

materials (mainly

mortar) for

installation.

MAINTENANCE

Soap used for

periodic cleaning.

TRANSPORT

2.88E-02 mPts

Waste transport

to the landfill

centers.

END-OF-LIFE

7.36E-04

7.20E-05

7.62E-02

4.10E-03 mPts

Landfilling after

the end of life.

Unit Impact category 0 Carcinogenics CTU,

CTU_L

kg PM_{2.5} eq

Smog	kg O ₃ eq	•	3.14E+00	8.56E-02	1.70E-01	4.40E-01	5.63E-02	2.22E-02
Additional environr	nental informatio	n						
Impact category	Unit							
Fossil fuel depletion	MJ, LHV	?	2.96E+01	2.12E+00	2.46E+00	7.04E+01	1.39E+00	1.62E-01
Ecotoxicity	CTU _e	?	2.87E+01	5.67E-01	5.87E-01	6.22E+00	3.72E-01	7.25E-03
ee the additional content	required by the SI	M Pa	rt B for interior and	l exterior stone flo	oring on page 4 o	f the Transparenc	y Report PDF.	

SM Part A: Life Cycle Assessment Calculation Rules and Report Requirements, v2018 March, 2018. Document created by Joep Meijer, Naji Kasem, and Kim Lewis

Advisory Board (TAB) as outlined in ISO 14025:2006.

ISO 14025, "Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services"

enable purchasers and users to compare the potential environmental performance of products on a life cycle basis. They are designed to present information transparently to make the limitations of comparability more understandable. A limitation to this study is that not all manufacturers in North America participated. TRs/EPDs of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore, cannot be used as comparative Comparability' are satisfied. Comparison of the environmental performance of building envelope thermal insulation using EPD information shall be based on the product's use and impacts at the

SM Transparency Reports (TR) are ISO 14025 Type III environmental declarations (EPD) that

SM Transparency Report (EPD)™ **VERIFICATION** LCA This environmental product **SUMMARY** declaration (EPD) was externally **Reference PCR**

> President, Ecoform. **Ecoform. LLC** 11903 Black Road, Knoxville, TN 37932

© 2022 | The SM Transparency Report [EPD]™ Program is operated by Sustainable Minds® (www.sustainableminds.com) | Privacy policy

(865) 850-1883

21930:2017, SM Part A, and ISO

14025:2006, by Jack Geibig,

verified, according to ISO

North America; Cradle to grave

LCA conducted by: Sustainable Minds

LCA software; LCI database SimaPro Developer 9.4

Ecolnvent 3.8, US-EI 2.2

Public LCA:

Functional unit / reference service life: 1 m² of floor covering; 75 years LCIA methodology: TRACI 2.1

LEED BD+C: New Construction | v4 - LEED v4 Building product disclosure and optimization **Environmental product declarations**

The intent is to reward project teams for selecting products from

manufacturers who have verified improved life-cycle environmental

Mat 02 - Environmental impacts from construction products **Environmental Product Declarations (EPD)** Industry-average EPD Multi-product specific EPD

LEED BD+C: New Construction | v4.1 - LEED v4.1

Building product disclosure and optimization

Environmental product declarations

BREEAM New Construction 2018

Polycor Inc. 76 rue Saint-Paul, Suite 100 Quebec City (Quebec), Canada G1K 3V9 418-692-4695

Contact us

SM Transparency Catalog ► Polycor ► Granite Floor and Pavers

How we make it greener

See LCA results by life cycle stage

Granite Floor and Pavers

Collapse all

RAW MATERIALS ACQUISITION

Natural stone quarrying process has high yields and little excess material because the stone is close to surface. It's different from metal mining, where large amounts of earth must be removed to extract very little quantities. Also, underground quarrying, which has been perfected for generations at our Eureka Quarry, reduces land use and is a practice that Polycor wishes to extend to several quarries.

In addition, few consumables are needed to extract natural stone. Contrast that with other building materials, Polycor specifically focuses on sourcing the highest grades of natural stone so that, for instance, a black granite stone, doesn't need dyes to achieve its rich color.

From the bedrock to the point of sale, Polycor maintains an unbroken ownership of the supply chain allowing it to maintain standards of quality and practice.



2 LCA RESULTS & INTERPRETATION 3 HOW WE MAKE IT GREENER

TRANSPORTATION

Using stone from local sources is the single biggest opportunity to reduce its embodied carbon. Since natural stone is a heavy material, the environmental impacts for transporting it end up being one of its most significant source of carbon. Natural stone is sourced world-wide and each deposit has unique aesthetic and performance characteristics so this is not always avoidable. Be sure to understand the distances between the quarry, the processing facility, sometimes the distribution centers but also the transportation mode. In most of Polycor's operations, the quarry is within miles of the processing facility.



MANUFACTURING

Manufacturing natural stone is so simple that you can sumarize it by a single action, cutting. Cutting large piece into smaller pieces ending in a finished product. Also, the beauty of natural stone products is that there is no chemical mixed within our products. Therefore, they are inherently a non-emitting source of VOCs.

Recycling water is reused several times into the manufacturing process and is compulsory to achieve ANSI 373 Standard.

There are a large variety of sizes and finishes that are commonly used for natural stone. Design teams can help reducing energy consumption in the following ways: Usage of low embodied carbon finishes such as water jet, 3D analysis to loose as few stone as possible troughout it's transformation, accepting the natural variation in the material so there is more usable material.



OTHER (USE, END OF LIFE)

Whether you think of the Egyptian pyramids, the Colosseum of Rome, the cathedrals of the European capitals or closer to us; the famous Empire State building; natural stone is the most durable, classic and timeless building material on Earth. With 100+ years of durability, natural stone lasts longer than other building construction material and projects that use natural stone require less maintenance.

Since we don't use any chemicals, natural stone products as well as excess process materials throughout the extraction and transformation phases can be reused or recycled into gravel for roads, landscaping products and even furniture and jewelry. In short, natural stone can be reused and recycled multiple times during its life cycle; the only limit is your imagination!

Nevertheless, even if natural stone ends up in a construction landfill, there will be no toxic chemicals seeping into the earth as the material degrades. It simply returns to the earth, cradle to cradle.



绘

SM Transparency Report (EPD)™

LCA

VERIFICATION

3rd-party reviewed

Ø

Transparency Report (EPD)

3rd-party verified

Validity: 2023/02/13 - 2028/02/13 Decl #: POL - 20230213 - 001 This environmental product declaration (EPD) was externally verified, according to ISO 21930:2017, SM Part A, and ISO 14025:2006, by Jack Geibig, President, Ecoform.

Ecoform, LLC 11903 Black Road, Knoxville, TN 37932 www.ecoform.com (865) 850-1883



SUMMARY

Reference PCR

SM PCR Part B: Interior and Exterior Stone

Regions; system boundaries

North America; Cradle to grave

Functional unit / reference service life: 1 m² of floor covering; 75 years

LCIA methodology: TRACI 2.1

LCA software; LCI database SimaPro Developer 9.4 Ecolnvent 3.8, US-EI 2.2

LCA conducted by: Sustainable Minds
Public LCA:

Life Cycle Assessment of Natural Stone Flooring for Polycor

Polycor Inc.

76 rue Saint-Paul, Suite 100 Quebec City (Quebec), Canada G1K 3V9 418-692-4695

www.polycor.com



Contact us

Data

Background This product-specific declaration was created by collecting product data for one square meter of granite floor covering. Material and production inputs from each quarry and processor site were used to calculate weighted averages of those inputs based on the production share of the site.

Allocation The allocation methods used were examined according to the updated allocation rules in ISO 21930:2017. Quarry inputs and outputs were divided evenly among the quarried granite by mass, and no co-product allocation was needed. Similarly, no co-product allocation was required for processor operations as well since processing data was collected from Polycor's processing plants specific to granite. The processor inputs and outputs were divided evenly among the processed stone by area.

Cut-off criteria for the inclusion of mass and energy flows are 1% of renewable primary resource (energy) usage, 1% nonrenewable primary resource (energy) usage, 1% of the total mass input of that unit process, and 1% of environmental impacts. The total of neglected input flows per module does not exceed 5% of energy usage, mass, and environmental impacts. No known flows are deliberately excluded from this declaration. Biogenic carbon is included in reported results.

Quality Primary data was collected for a time period of two years, which represents typical operations of Polycor's granite quarry and processors across North America. Inventory data is considered to have a good precision and provide a representative depiction of the industry average. Data is also considered to be complete as no know flows are deliberately excluded from this analysis other than those defined to be outside of the system boundary. Proxy and generic datasets have been used for some materials and processes, but are considered to be sufficiently representative. **Quarry and Manufacturing Plant information**

Data Group	Quarry location(s)
American Granite Quarries	American Black Quarry, Elverson, PA Barre Gray Quarry, Graniteville, VT Bethel White Quarry, Bethel, VT Concord Gray Quarry, Concord, NH Mount Airy Quarry, Mount Airy, NC
Canadian Granite Quarries	Caledonia 4 Quarry, Quebec Cambrian Black Quarry, Quebec Kodiak Brown Quarry Laurentian Rose Quarry, Quebec Picasso Quarry, Quebec Saint Henry Black Quarry, Quebec Saint Sebastien Quarry, Quebec Stanstead ROA Quarry, Quebec
Data Group	Manufacturing Plant location(s)
American Granite Plants	Mount Airy Plant, Mount Airy, NC Concord Plant, Concord, NH Jay White Plant, Jay, ME
Canadian Granite Plants	Beaudoin Plant, Quebec Precision Plant, Quebec Rivière-à-Pierre Plant, Quebec Saint Sebastien Slab Plant, Quebec Saint Sebastien Tile Plant, Quebec

Parameter	Unit	Test Method	Value					
CSI Masterformat classification	09 30 33; 09 63	09 30 33; 09 63 40; 32 14 40						
Stone type	Granite							
Stone grades	All grades							
Thickness to achieve functional unit	mm		12.70					
Product weight	kg		29.79					
Density	kg/m ³		2654					
Flexural strength	Мра	C880	8.27					
Modulus of rupture	MPa	C99	10.34					
Compressive strength	MPa	C170	131.00					
Thermal conductivity	W/m.k	C518	1.73					
Thermal resistance	m.K/W	C518	0.56					
Liquid water absorption	% of dry wt	C97	0.1-1.0					

• Maintenance and operation of support equipment;

Major system boundary exclusions

• Manufacture and transport of packaging materials not associated with final product;

• Capital goods and infrastructure,

Relevant technical properties

- Human labor and employee transport;
- Building operational energy and water use not associated with final product.
- **Production flow chart**

Stone Quarrying — Use of explosives, power drills,

power saws, diamond belts etc. — stone blocks extracted from natural rock layers. Stone transport from quarries to

Stone Processing — Stone blocks go through block saws, saw slabs, bridge saws etc.-

processing facilities

stone blocks processed to stone flooring and paving products.

Scenarios and additional technical information

Transport from Quarry to Processor (A2)

Based on the primary data, the transport distance between Polycor's granite quarry and processing facilities varies, & the weighted distance is 83 km.

Transport to the building site (A4)

Parameter	Value	Unit
Vehicle type	Lorry, 16-32 to	n
Fuel type	Diesel	
Liters of fuel	0.41	l/100 km
Distance from manufacturer to installation site	199.5	km (weighted avg)
Capacity utilization (mass based)	100	%
Gross density of products transported	2,654	kg/m ³
Capacity utilization volume factor	1	

Based on EPA's 2018 data, it has been assumed that 37% of all packaging will be landfilled, with the rest recycled.

Packaging scenario assumptions

Installation into the building (A5)

It is assumed that flooring fabrication (cutting and finishing to required size) is done at

Installation scrap assumed

the processing plants and is typically delivered to the job site ready for installation. For the minor changes necessary to accommodate changes, we have considered the use of manual equipment like hackshaws, tile cutters, handle, chisels, tile nippers etc.

Ancillary materials -	Mortar Grout Acrylate	4.07 0.21 0.04	kg
Net freshwater consumption		0.0004	m^3
Electricity consumption		0	kWh
Product loss per functional unit (scrap)		1.49	kg
Waste materials at the construction site be processing (stone scrap and packaging was		2.41	kg
Output materials from on-site waste proce	ssing	0	kg
Mass of packaging waste by type	Cardboard Wood	0.009 3.29	kg
Biogenic carbon contained in packaging		6.05	kg CO ₂
Direct emissions to ambient air, soil and wa	ater	0	kg
VOC emissions	0	μg/m³	
Transport distance for both stone scrap an waste (Diesel-powered truck/trailer)	d packaging	161	km
Maintenance scenario parameters			

Maintenance process information

Maintenance process information	Cleaning the surface of granite flooring						
Maintenance cycle	Monthly cleaning (900 cycles per RSL & per ESL)						
Net freshwater consumption - municipal water supply	0.09 (for entire lifetime) m ³						
Ancillary materials - Soap	4.5 (for entire lifetime) kg						
Energy input during maintenance	Not necessary						
Reference service life information							

Reference Service Life (RSL)

Design application parameters	Outdoor and indoor applications
Outdoor environment	Installation as recommended by manufacturer.
Indoor environment	Installation as recommended by manufacturer.
Use conditions	All conditions
End of life (C1-C4)	

The product is dismantled and removed from the building

Assumptions for scenario development		ere it requires							
Collection process	Collected separately	0	kg						
	Collected with mixed construction waste	33.86	kg						
Recovery	Reuse	0	kg						
	Recycling (0%)	0	kg						
	Landfill (100%)	33.86	kg						
Waste transport		161	km						
Final disposal		33.86	kg						
Removals of biogenic car	0	kg CO ₂							
Hazardous waste									

hazardous according to the Resource Conservation and Recovery Act (RCRA), Subtitle C.

Calcination CO₂ emissions Although calcination and carbonation is not relevant to granite flooring products, calcination occurs during installation stage due to the use of mortar. Mortar includes

Polycor's granite flooring does not contain substances that are identified as

cement calcination CO₂ emissions which is calculated & reported separately using a carbon intensity factor of 886 CO₂ per ton of cement (Source: U.S. Cement Industry Carbon

1 1/2"

2.81E-07

4.40E-01 0

2"

1.36E-07

5.63E-02

5"

1.30E-08

2.22E-02

1.86E-06

3.91E+00

Intensities (2019)).

Thickness

Ozone depletion

Scaling factors

Conversion factor 0.625 1.0 1.5 3.0 4.0 8.0 10.0 LCIA results, resource use, output & waste flows, and carbon emissions & removals per m² of granite flooring

3/4"

The results presented below have been reported for a flooring thickness of 0.5 inches. However, they may be scaled according to different thicknesses as desired using

scaling factors. To calculate the results for additional thickness options, simply multiply the results by the corresponding conversion factor presented here:

1.23E-07

1/2"

2.07E-07

5/16"

kg CFC-11 eq 1.10E-06

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3-B7	C1	C2	C3	C4	Total

Global warming kg O3 eq 3.14E+00 8.56E-02 1.70E-01 0 Smog

LCIA results (per m² of granite flooring)

Acidification	kg SO2 eq	1.30E-01	3.26E-03	1.18E-02	0	3.31E-02	0	0	2.14E-03	0	7.36E-04	1.81E-01
Eutrophication	kg N eq	1.66E-02	4.38E-04	6.90E-04	0	2.53E-02	0	0	2.88E-04	0	7.20E-05	4.34E-02
Carcinogenics	CTUh	1.05E-06	4.32E-10	1.70E-08	0	3.57E-08	0	0	2.84E-10	0	2.23E-11	1.10E-08
Non-carcinogenics	CTUh	2.11E-06	3.91E-08	1.97E-08	0	3.79E-07	0	0	2.57E-08	0	8.83E-10	2.75E-06
Respiratory effects	kg PM2.5 eq	1.26E-02	2.05E-04	1.07E-03	0	1.31E-02	0	0	1.34E-04	0	9.55E-05	2.72E-02
Ecotoxicity	CTUe	78.7%	1.6%	1.6%	0%	17.1%	0%	0%	1.0%	0%	0%	100%
Fossil fuel depletion	MJ surplus	2.96E+01	2.12E+00	2.46E+00	0	7.04E+00	0	0	1.39E+00	0	1.62E-01	4.28E+01
Resource use indicator	s (per m² o	f granite fl	ooring)									
Renewable primary energy used as energy carrier (fuel)	MJ, LHV	1.04E+02	2.17E-02	1.48E+00	0	1.97E+02	0	0	1.43E-02	0	2.20E-03	3.02E+02
Renewable primary resources with energy content used as	MJ, LHV	9.12E+01	0	0	0	0	0	0	0	0	0	9.12E+01

used as energy carrier (ruer)												
Renewable primary resources with energy content used as material	MJ, LHV	9.12E+01	0	0	0	0	0	0	0	0	0	9.12E+01
Total use of renewable primary resources with energy content	MJ, LHV	1.95E+02	2.17E-02	1.48E+00	0	1.97E+02	0	0	1.43E-02	0	2.20E-03	3.93E+02
Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	4.07E+02	1.40E+01	2.35E+01	0	7.90E+01	0	0	9.17E+00	0	1.07E+00	5.34E+02
Non-renewable primary resources with energy content used as material	MJ, LHV	6.00E+00	0	0	0	0	0	0	0	0	0	6.00E+00
Total use of non-renewable primary resources with energy content	MJ, LHV	4.13E+02	1.40E+01	2.35E+01	0	7.90E+01	0	0	9.17E+00	0	1.07E+00	5.40E+02
Secondary materials	kg	0	0	0	0	0	0	0	0	0	0	0
Renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0
Non-renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0
Recovered energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0
Use of net fresh water resources	m3	3.27E+01	2.36E-03	2.21E+00	0	2.09E-01	0	0	5.15E-03	0	1.87E-04	3.51E+01
Output flows and waste	category i	ndicators	(per m² of	f granite f	looring	1)						
Hazardous waste disposed	kg	2.41E-03	0	0	0	0	0	0	0	0	0	2.41E-03
Non-hazardous waste disposed	kg	6.23E-01	0	2.69E+00	0	0	0	0	0	0	3.10E+01	3.43E+01

Intermediate- and low-level radioactive waste, conditioned, kg 2.71E-05 1.19E-08 5.84E-07 0 1.02E-06

conditioned, to final repository

Biogenic carbon emission from combustion of waste from

renewable sources used in production processes

Calcination carbon emissions

kg CO₂

kg CO₂

to final repository												
Components for re-use	kg	0	0	0	0	0	0	0	0	0	0	0
Materials for recycling	kg	1.76E+02	0	2.92E+00	0	0	0	0	0	0	0	1.79E+02
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0
Exported energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0
Carbon emissions and removals (per m ² of granite flooring)												
Biogenic carbon removal from packaging	kg CO ₂	6.05E+00	0	3.02E-01	0	0	0	0	0	0	0	6.35E+00
Biogenic carbon emission from packaging	kg CO ₂	0	0	4.59E+00	0	0	0	0	0	0	0	4.59E+00

0

High-level radioactive waste, conditioned, to final repository kg 2.59E-01 1.13E-06 3.10E-04 0 9.36E-05 0 0 7.46E-07 0 1.15E-07 2.59E-01

0

0

0

0

7.82E-09

1.21E-09

2.87E-05

1.01E+00

0

Carbon emissions from combustion of waste from 0 0 0 non-renewable sources used in production processes

© 2023 | The SM Transparency Report™ Program is operated by Sustainable Minds® | Member, Program Operator Consortium | All rights reserved Privacy policy

1.01E+00

0