


MISSISQUOI VERDE DE AQUA

MARBLE

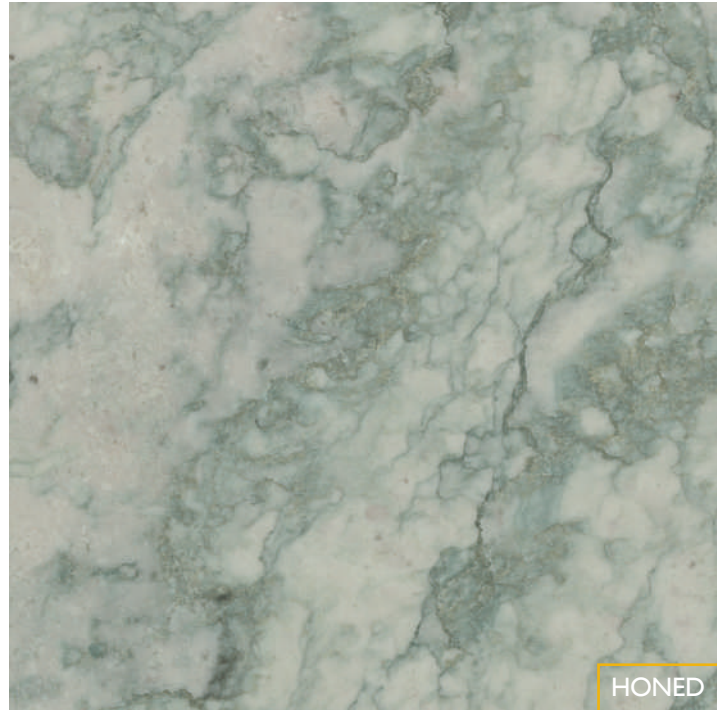

DESCRIPTION

Silvery-cool grey tones are exhibited in this level of the Missisquoi quarry, punctuated by a web of fine, seafoam green veins that flow throughout the surface of the stone like the ocean's waves swirling around a rocky coastline. The extremely dense, homogenous mineral structure of this hard marble make it an ideal choice where superior strength is needed in a design.

QUARRY OPERATING SINCE 1905 | **ANNUAL PRODUCTION** | 200 m³ and more
(42 000 cu. ft.)

FINISHES AVAILABLE


Antique Sandblasted
Honed
Polished

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.073%	0.073%
Density	ASTM C97	169 lb/ft ³	2 707 kg/m ³
Compressive strength	ASTM C170	15 289 Psi	105.4 Mpa
Modulus of rupture	ASTM C99	1 305.3 Psi	9.0 Mpa
Flexural strength	ASTM C880	1 218.3 Psi	8.4 Mpa

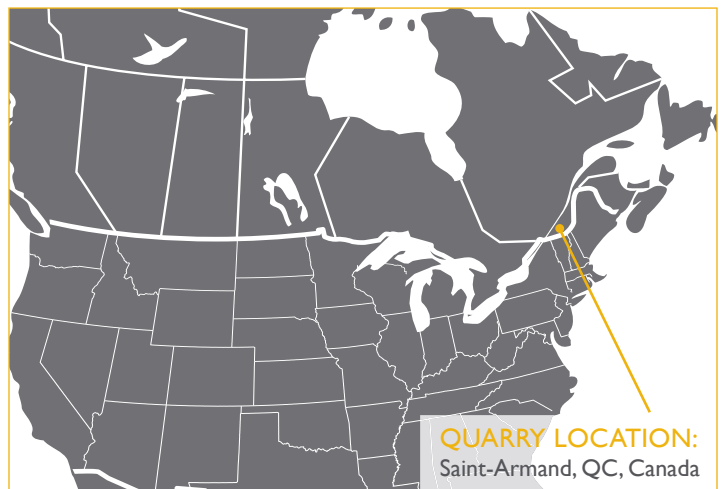

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.